

Preventing the loss of corrosion inhibitor

Njord J-Tube S (Seal)

In the subsea environment pipe connections are at risk of corrosion, due to the level of acidity in the water. This corrosion reduces the stability of the pipeline, increasing the likelihood of leakage.

Njord J-Tube S (Seal) are used to prevent the loss of corrosion inhibitor solution used in the annulus between the host line and the J-Tube bore.

Diverless and modular design


The seal is secured to the host line by integral clamps. It can then be pulled into the J-Tube or I-Tube with the host line. Typically the seal will be installed in the J-Tube just behind the entry bellmouth.

Interference fit

Polyurethane seal elements are used to provide an interference fit to the host line and the J-Tube bore. The interference fit provides the seal – no subsea activation is necessary.

Corrosion inhibitor retention

Njord J-Tube S is primarily used to prevent the loss of corrosion inhibitor within the J-Tube annulus.

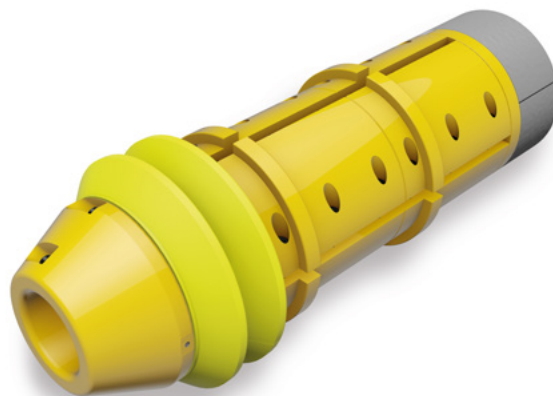

Key Applications

- J-Tube
- Centralized action
- Ancillary attachment



Contact Us

Trelleborg Applied Technologies division is an industry expert in delivering innovative and reliable solutions that maximize performance for our customers. Our vast range of specialized, customizable materials ensure peace of mind at every stage of your project. With reliable and efficient project management and manufacturing we endeavour to take performance to new levels by achieving your goals safely, on time and within scope.



Brazil: +55 22 2106 4040
Skem: +44 1695 712 000
Houston: +1 832 456 8300



Email: appliedtechnologies@trelleborg.com



TRELLEBORG

WWW.TRELLEBORG.COM/APPLIED-TECHNOLOGIES