

Preventing the loss of corrosion inhibitor

Njord J-Tube S (Seal)

In the subsea environment pipe connections are at risk of corrosion, due to the level of acidity in the water. This corrosion reduces the stability of the pipeline, increasing the likelihood of leakage.

Njord J-Tube S (Seal) are used to prevent the loss of corrosion inhibitor solution used in the annulus between the host line and the J-Tube bore.

Diverless and modular design


The seal is secured to the host line by integral clamps. It can then be pulled into the J-Tube or I-Tube with the host line. Typically the seal will be installed in the J-Tube just behind the entry bellmouth.

Interference fit

Polyurethane seal elements are used to provide an interference fit to the host line and the J-Tube bore. The interference fit provides the seal – no subsea activation is necessary.


Corrosion inhibitor retention

Njord J-Tube S is primarily used to prevent the loss of corrosion inhibitor within the J-Tube annulus.

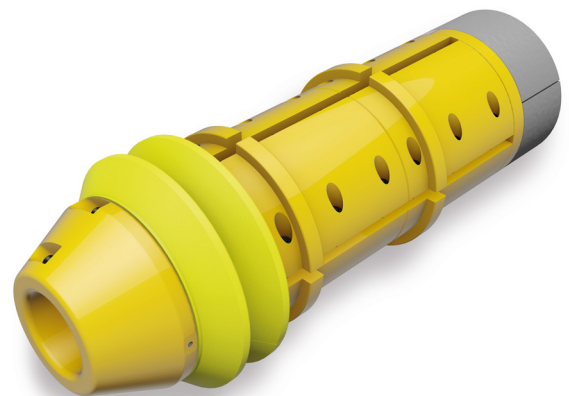

Key Applications

- J-Tube
- Centralized action
- Ancillary attachment

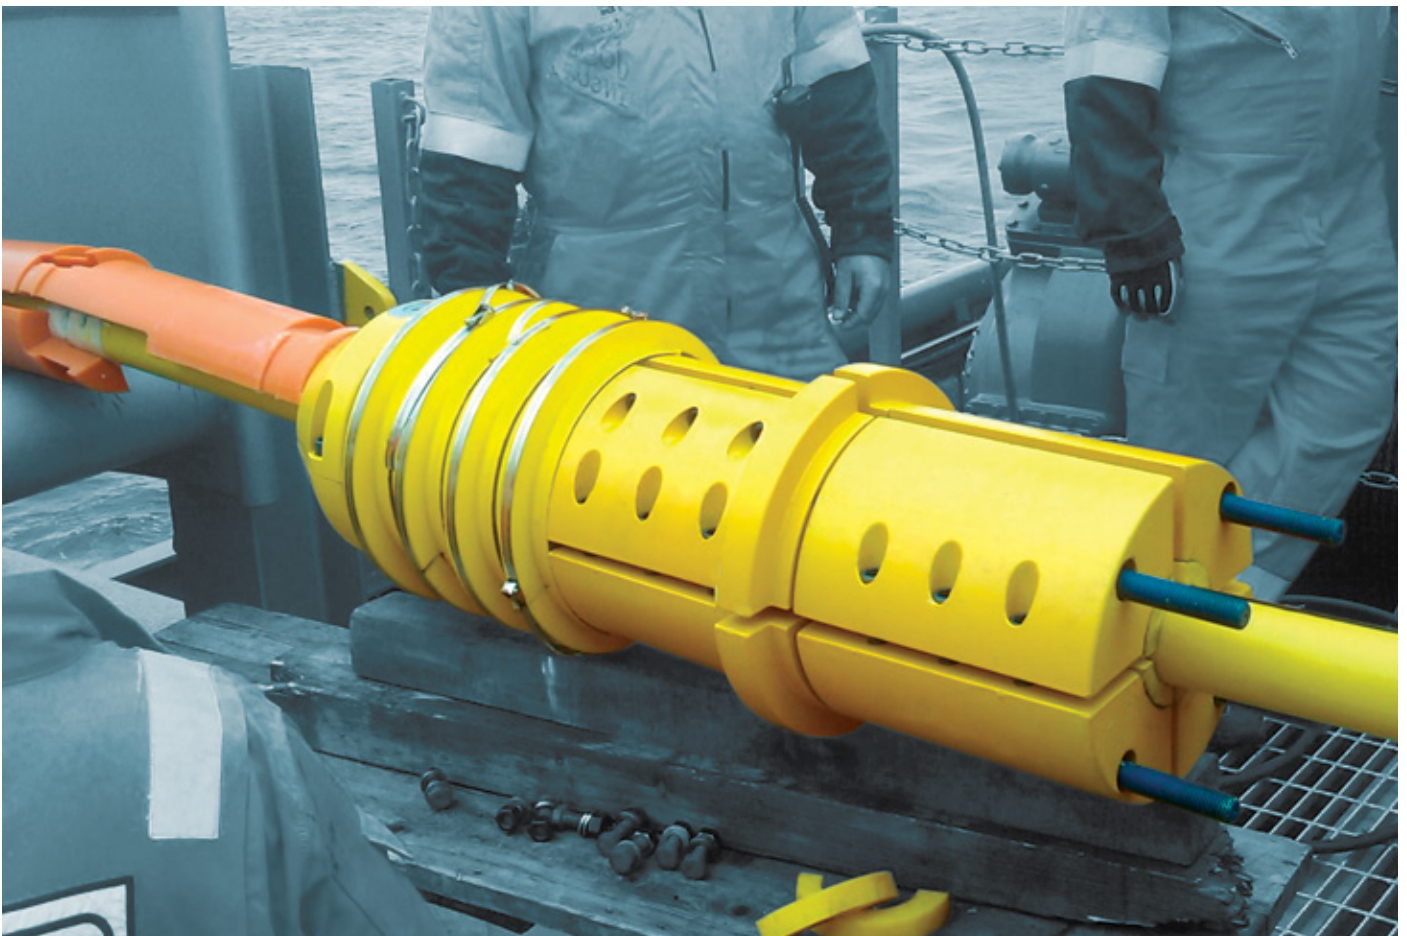

Contact Us

Trelleborg Offshore delivers innovative and reliable offshore solutions that maximize business performance to meet your needs. Our dedicated and highly skilled staff are always on hand to provide seamless process support from initial idea, through to delivery and beyond.



Brazil: +55 22 2106 4040
China: +86 137 9287 9241
France: +33 3 44 23 03 50
Norway: +47 32 23 20 00
Singapore: +65 6265 0955
United Kingdom: +44 1695 712 000
United States: +1 832 456 8300



Email: Offshore@trelleborg.com



TRELLEBORG

WWW.TRELLEBORG.COM/OFFSHORE