

# Printec® 3195

## Pre-press advantages

- Knock-out areas without strings
- Fast and accurate cad cutting
- Easy to strip with clear and visible cut lines
- Easy to be handled and re-used


## Press room advantages

- No fabrics pattern
- Reduced back trapping
- Softer surface and reduced hardness
- Consistent coating transfer over long runs

## MAIN APPLICATION

### Coating

**Printec 3195: rubber-surface new coating plate, no fabrics**

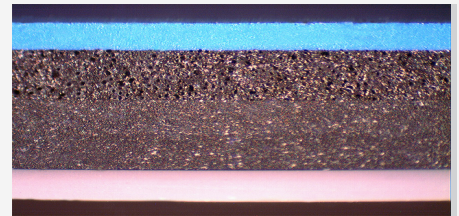

## ✓ The product at a glance

<b>COMPATIBILITY</b>	Aqueous and UV coatings
<b>PRINTING SURFACE COLOUR</b>	Blue
<b>SURFACE</b>	Rubber
<b>SURFACE ROUGHNESS (Ra micron)</b>	0,6 micron
<b>NOMINAL THICKNESS*</b>	1,95 mm (0,077") +/- 0,05 mm (0,0002").
<b>CARRIER</b>	Polyester
<b>CARRIER THICKNESS</b>	0,35 mm (0,014")
<b>CUTTING DEPTH</b>	1,60 mm (0,063")
<b>ADDITIONAL INFORMATION</b>	
<b>CUTTING ADVISE</b>	CAD cutting into the mylar might reduce mechanical properties of the coating plate

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION PLEASE REFER TO YOUR SALES MANAGER OR EMAIL US AT: [printingsm@trelleborg.com](mailto:printingsm@trelleborg.com)**