

# vulcan<sup>®</sup> Alto ND2


## Key performance

- Excellent top face resistance
- Slightly positive paper feed
- High stability and versatility
- Long blanket lifetime
- High print quality

## MAIN APPLICATION

### Commercial Web Heatset

**Vulcan Alto ND2 is available in 3/4-ply, 1,96/1,71 mm thickness.**

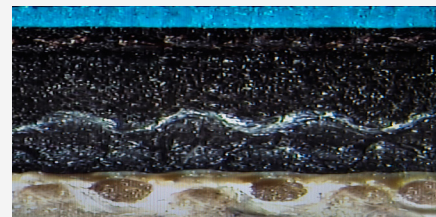

**Vulcan Alto ND2**



## The product at a glance

<b>INK COMPATIBILITY</b>	Conventional
<b>PRINTING SURFACE COLOUR</b>	Light Blue
<b>THICKNESS (mm)</b>	1,70/1,95
<b>AVERAGE LOAD VALUE N/cm<sup>2</sup> @ 0,23 mm Indentation</b>	250
<b>SURFACE ROUGHNESS (Ra micron)</b>	0,8
<b>FEED FEATURES</b>	Slightly Positive
<b>ELONGATION (%)</b>	<0,9
<b>TENSILE STRENGTHS (N/mm)</b>	>60
<b>WATER &amp; SOLVENT PROTECTION</b>	Yes
<b>ADDITIONAL INFORMATION</b>	
<b>PRESS FORMAT</b>	Premium choice for heatset

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printingsm@trelleborg.com](mailto:printingsm@trelleborg.com)**